

EITEL-McCULLOUGH, INC.

SAN BRUNO, CALIFORNIA

35T

HIGH-MU TRIODE
MODULATOR
OSCILLATOR
AMPLIFIER

► The Eimac 35T is a high-mu triode having a maximum plate dissipation of 50 watts. It is intended for use as an amplifier, oscillator or modulator, and can be used at its maximum ratings at frequencies up to 100 Mc.

The 35T is cooled by radiation and by free circulation of air around the envelope. The plate operates at a visible red color at full dissipation.

GENERAL CHARACTERISTICS

ELECTRICAL

Filament: Thoriated tungsten	
Voltage	5.0 volts
Current	4.0 amperes
Amplification Factor (Average)	39
Direct Interelectrode Capacitances (Average)	
Grid-Plate	1.8 $\mu\mu\text{fd}$
Grid-Filament	4.1 $\mu\mu\text{fd}$
Plate-Filament	0.3 $\mu\mu\text{fd}$
Transconductance ($I_b=100$ ma., $E_b=2000$ V, $E_c=-30$ V)	2850 μmhos
Frequency for Maximum Ratings	100 Mc.


MECHANICAL

Base: UX Medium 4-pin. Fits E. F. Johnson Co. 122-224, or National XC-4 or CIR-4 sockets.

Basing - - - - - See outline drawing
Mounting - - - - - Vertical, base down or up.
Cooling - - - - - Convection and radiation.

Recommended Heat Dissipating Plate Connector - - - - -
Maximum Overall Dimensions:

Length	5.5 inches
Diameter	1.8 inches
Net weight	2.5 ounces
Shipping weight (Average)	1.25 pounds

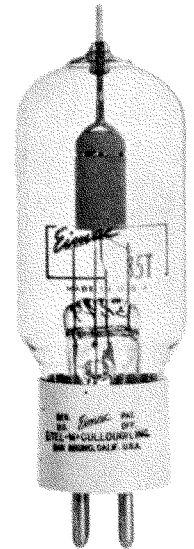

Eimac HR-3

AUDIO FREQUENCY POWER AMPLIFIER AND MODULATOR

► Class-AB₂ (Sinusoidal wave, two tubes unless otherwise specified)

MAXIMUM RATINGS	
D-C PLATE VOLTAGE	2000 MAX. VOLTS
D-C PLATE CURRENT	150 MAX. MA.
PLATE DISSIPATION	50 MAX. WATTS
GRID DISSIPATION	15 MAX. WATTS

TYPICAL OPERATION

D-C Plate Voltage	600	1000	1500	2000	Volts
D-C Grid Voltage (approx.)*	0	-8	-25	-40	Volts
Zero-signal D-C Plate Current	90	67	45	34	Ma.
Max-signal D-C Plate Current	300	240	200	167	Ma.
Effective Load Plate-to-Plate	4250	7900	16,200	27,500	Ohms
Peak A-F Input Voltage (per tube)	130	240	250	255	Volts
Peak Driving Power (approx.)	18	14	10	8	Watts
Nominal Driving Power (approx.)	9	7	5	4	Watts
Max-signal Plate Power Output	95	140	200	235	Watts

RADIO FREQUENCY POWER AMPLIFIER AND OSCILLATOR

► Class-C Telephony or FM Telephony (Key-down conditions, per tube)¹

MAXIMUM RATINGS	
D-C PLATE VOLTAGE	2000 MAX. VOLTS
D-C PLATE CURRENT	150 MAX. MA.
PLATE DISSIPATION	50 MAX. WATTS
GRID DISSIPATION	15 MAX. WATTS

TYPICAL OPERATION

D-C Plate Voltage	1000	1500	2000	Volts
D-C Grid Voltage	-40	-120	-135	Volts
D-C Plate Current	125	125	125	Ma.
D-C Grid Current	40	40	45	Ma.
Peak R-F Grid Input Voltage	165	250	285	Volts
Driving Power (approx.)	7	9	13	Watts
Grid Dissipation	4.2	5.0	6.8	Watts
Plate Power Input	125	188	250	Watts
Plate Dissipation	38	47	50	Watts
Plate Power Output	87	141	200	Watts

PLATE MODULATED RADIO FREQUENCY POWER AMPLIFIER

Class-C Telephony (Carrier conditions, per tube)¹


MAXIMUM RATINGS	
D-C PLATE VOLTAGE	1600 MAX. VOLTS
D-C PLATE CURRENT	120 MAX. MA.
PLATE DISSIPATION	33 MAX. WATTS
GRID DISSIPATION	15 MAX. WATTS

TYPICAL OPERATION

D-C Plate Voltage	750	1000	1500	Volts
D-C Grid Voltage	-100	-125	-150	Volts
D-C Plate Current	95	100	90	Ma.
D-C Grid Current	40	40	40	Ma.
Peak R-F Driving Voltage (approx.)	210	240	270	Volts
Driving Power (approx.)	9	10	11	Watts
Plate Dissipation	20	25	30	Watts
Plate Input	70	100	135	Watts
Plate Power Output	50	75	105	Watts

*Adjust for stated zero-signal plate current.

¹ The performance figures listed under Typical Operation are for radio frequencies up to the VHF region and are obtained by calculation from the characteristic tube curves and confirmed by direct tests. The driving power given includes power taken by the tube grid and the bias circuit. The driving power and output power do not allow for losses in the associated resonant circuits. These losses are not included because they depend principally upon the design and choice of the circuit components.

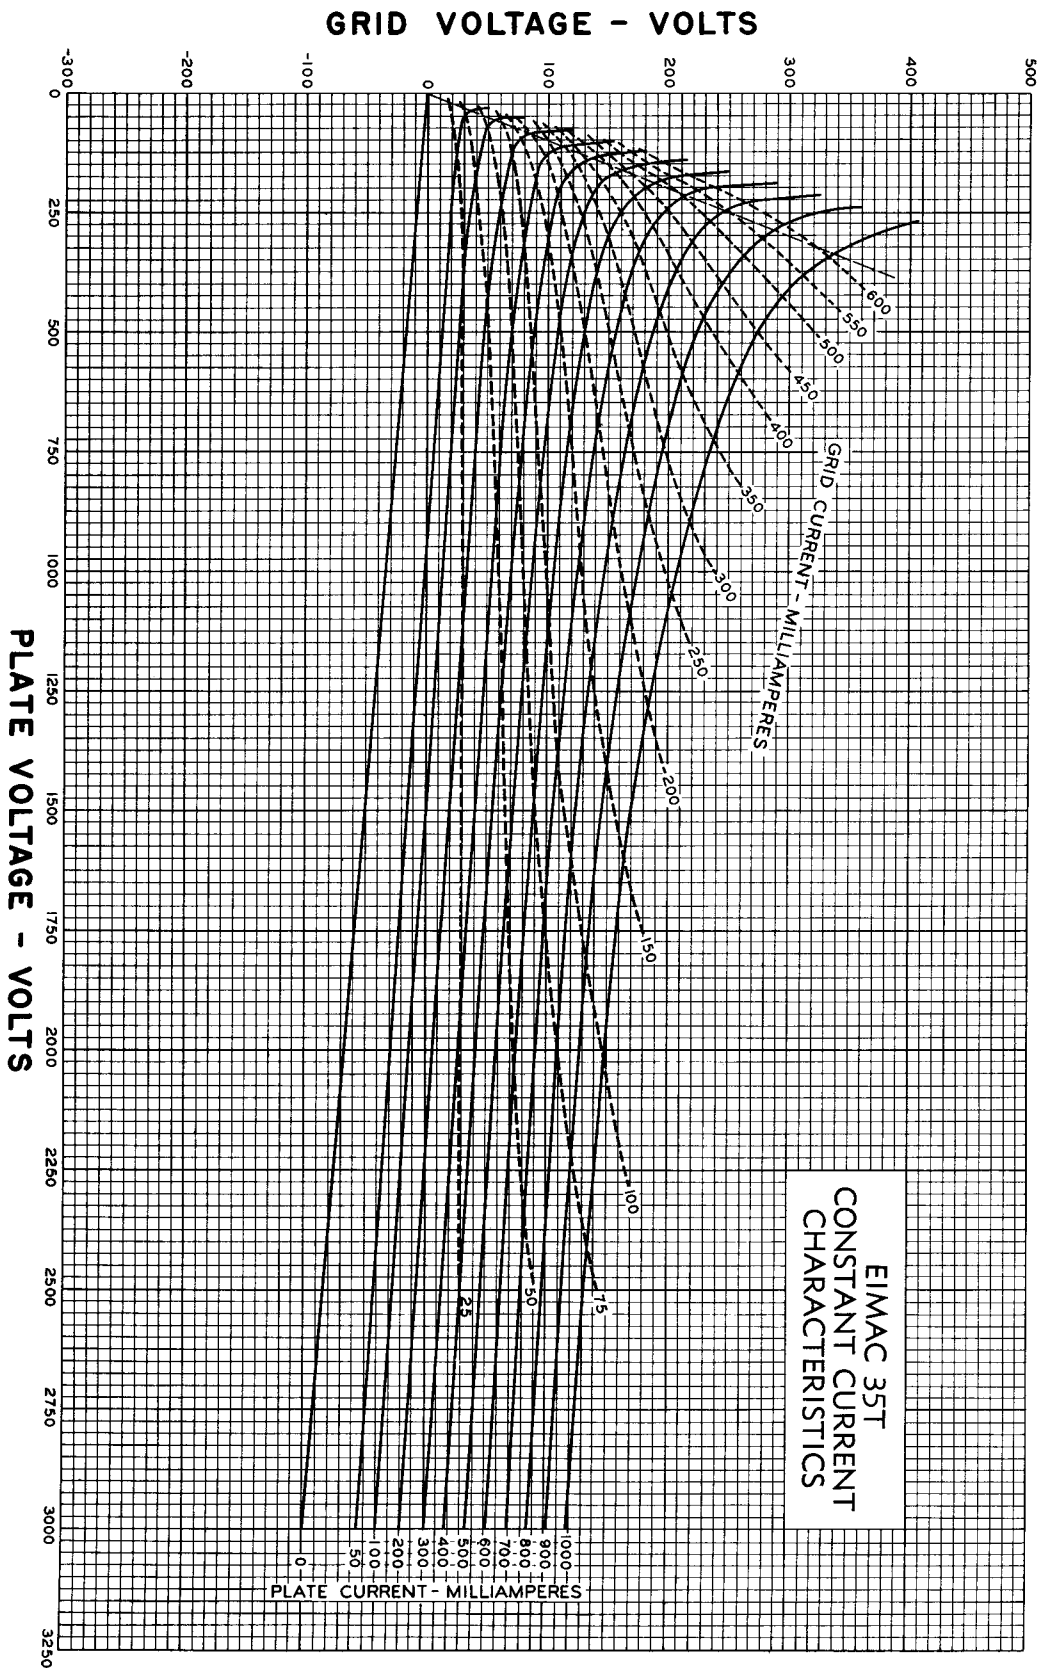

DRIVING POWER vs. POWER OUTPUT

The three charts on this page show the relationship of plate efficiency, power output and grid driving power at plate voltages of 1000, 1500 and 2000 volts. These charts show combined grid and bias losses only. The driving power and power output figures do not include circuit losses. The plate dissipation in watts is indicated by P_p .

Points A, B, and C are identical to the typical Class C operating conditions shown on the first page under 1000, 1500, and 2000 volts respectively.

