CENTRAL ELECTRONICS, INC.

10B CHANGE NOTICE - MODIFICATION "C"
MIXER CIRCUIT CHANGE

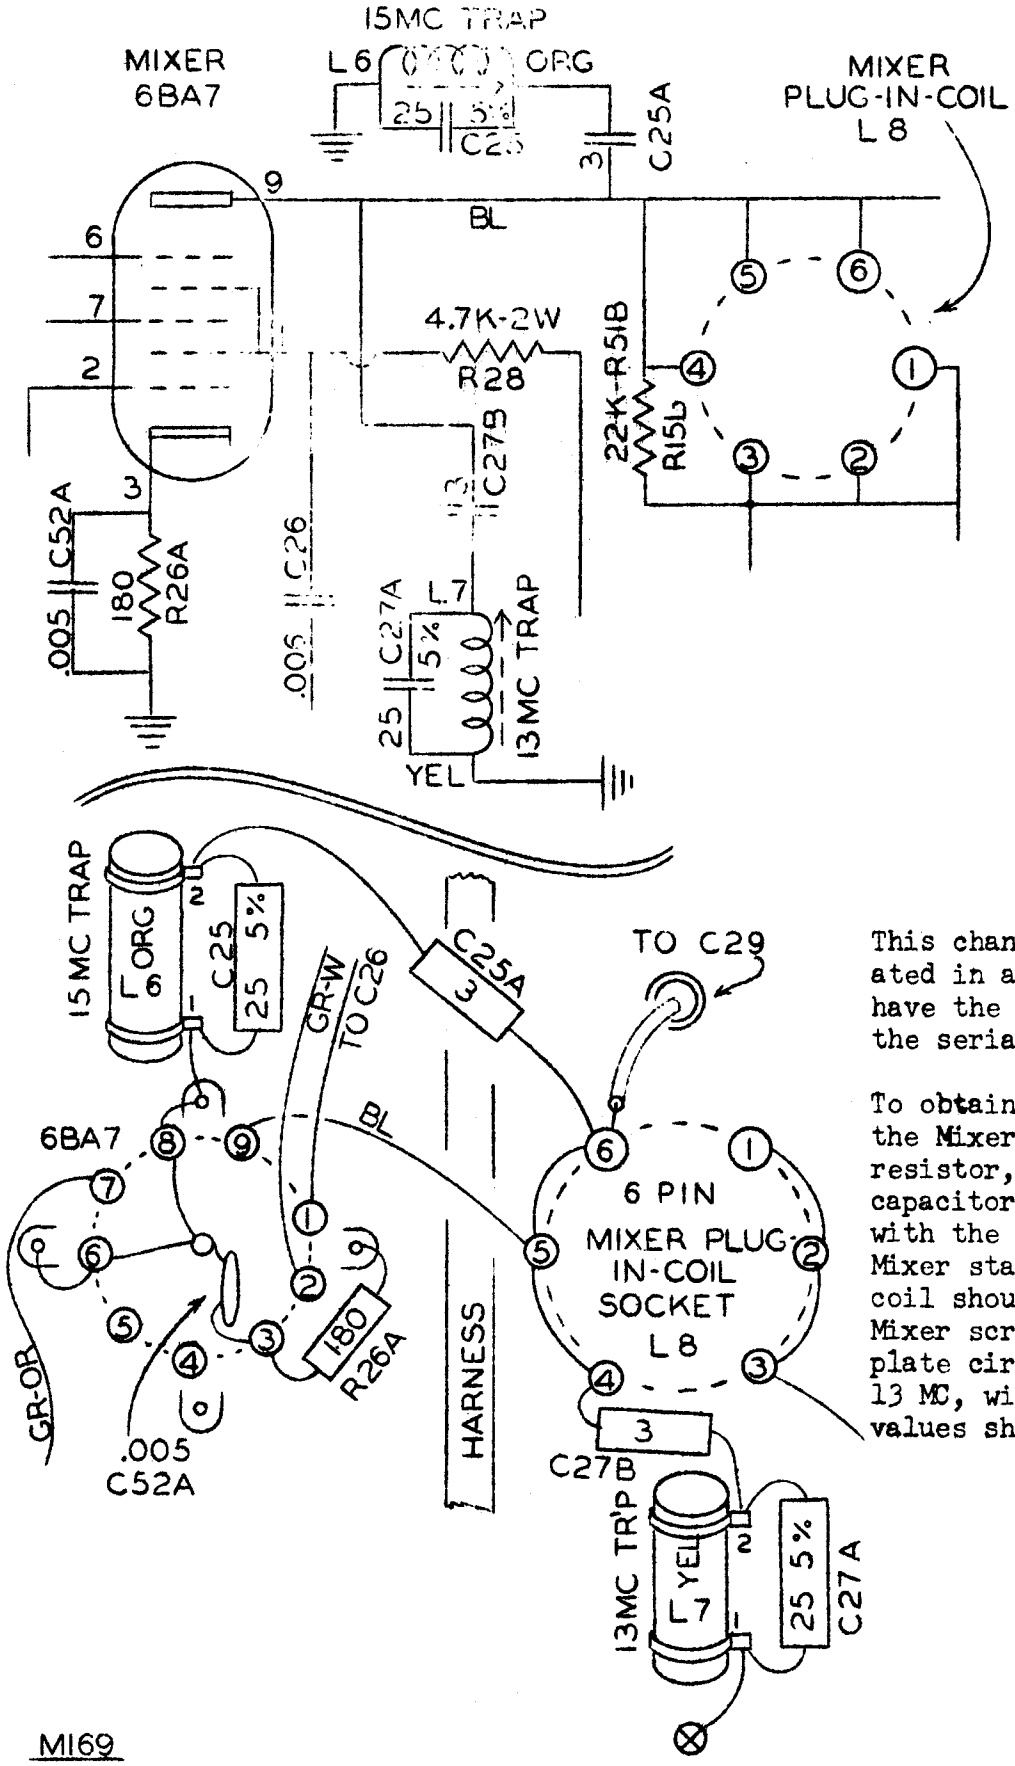

This change has been incorporated in all Exciters which have the letter "C" following the serial number.

To obtain better linearity in the Mixer stage a 180 ohm resistor, bypassed with a .005 capacitor, is used in series with the cathode of the 6BA7 Mixer stage. The yellow trap coil should be moved from the Mixer screen circuit to the plate circuit and tuned to 13 MC, with the new capacitor values shown above.

M169
107MX
1-29-57