
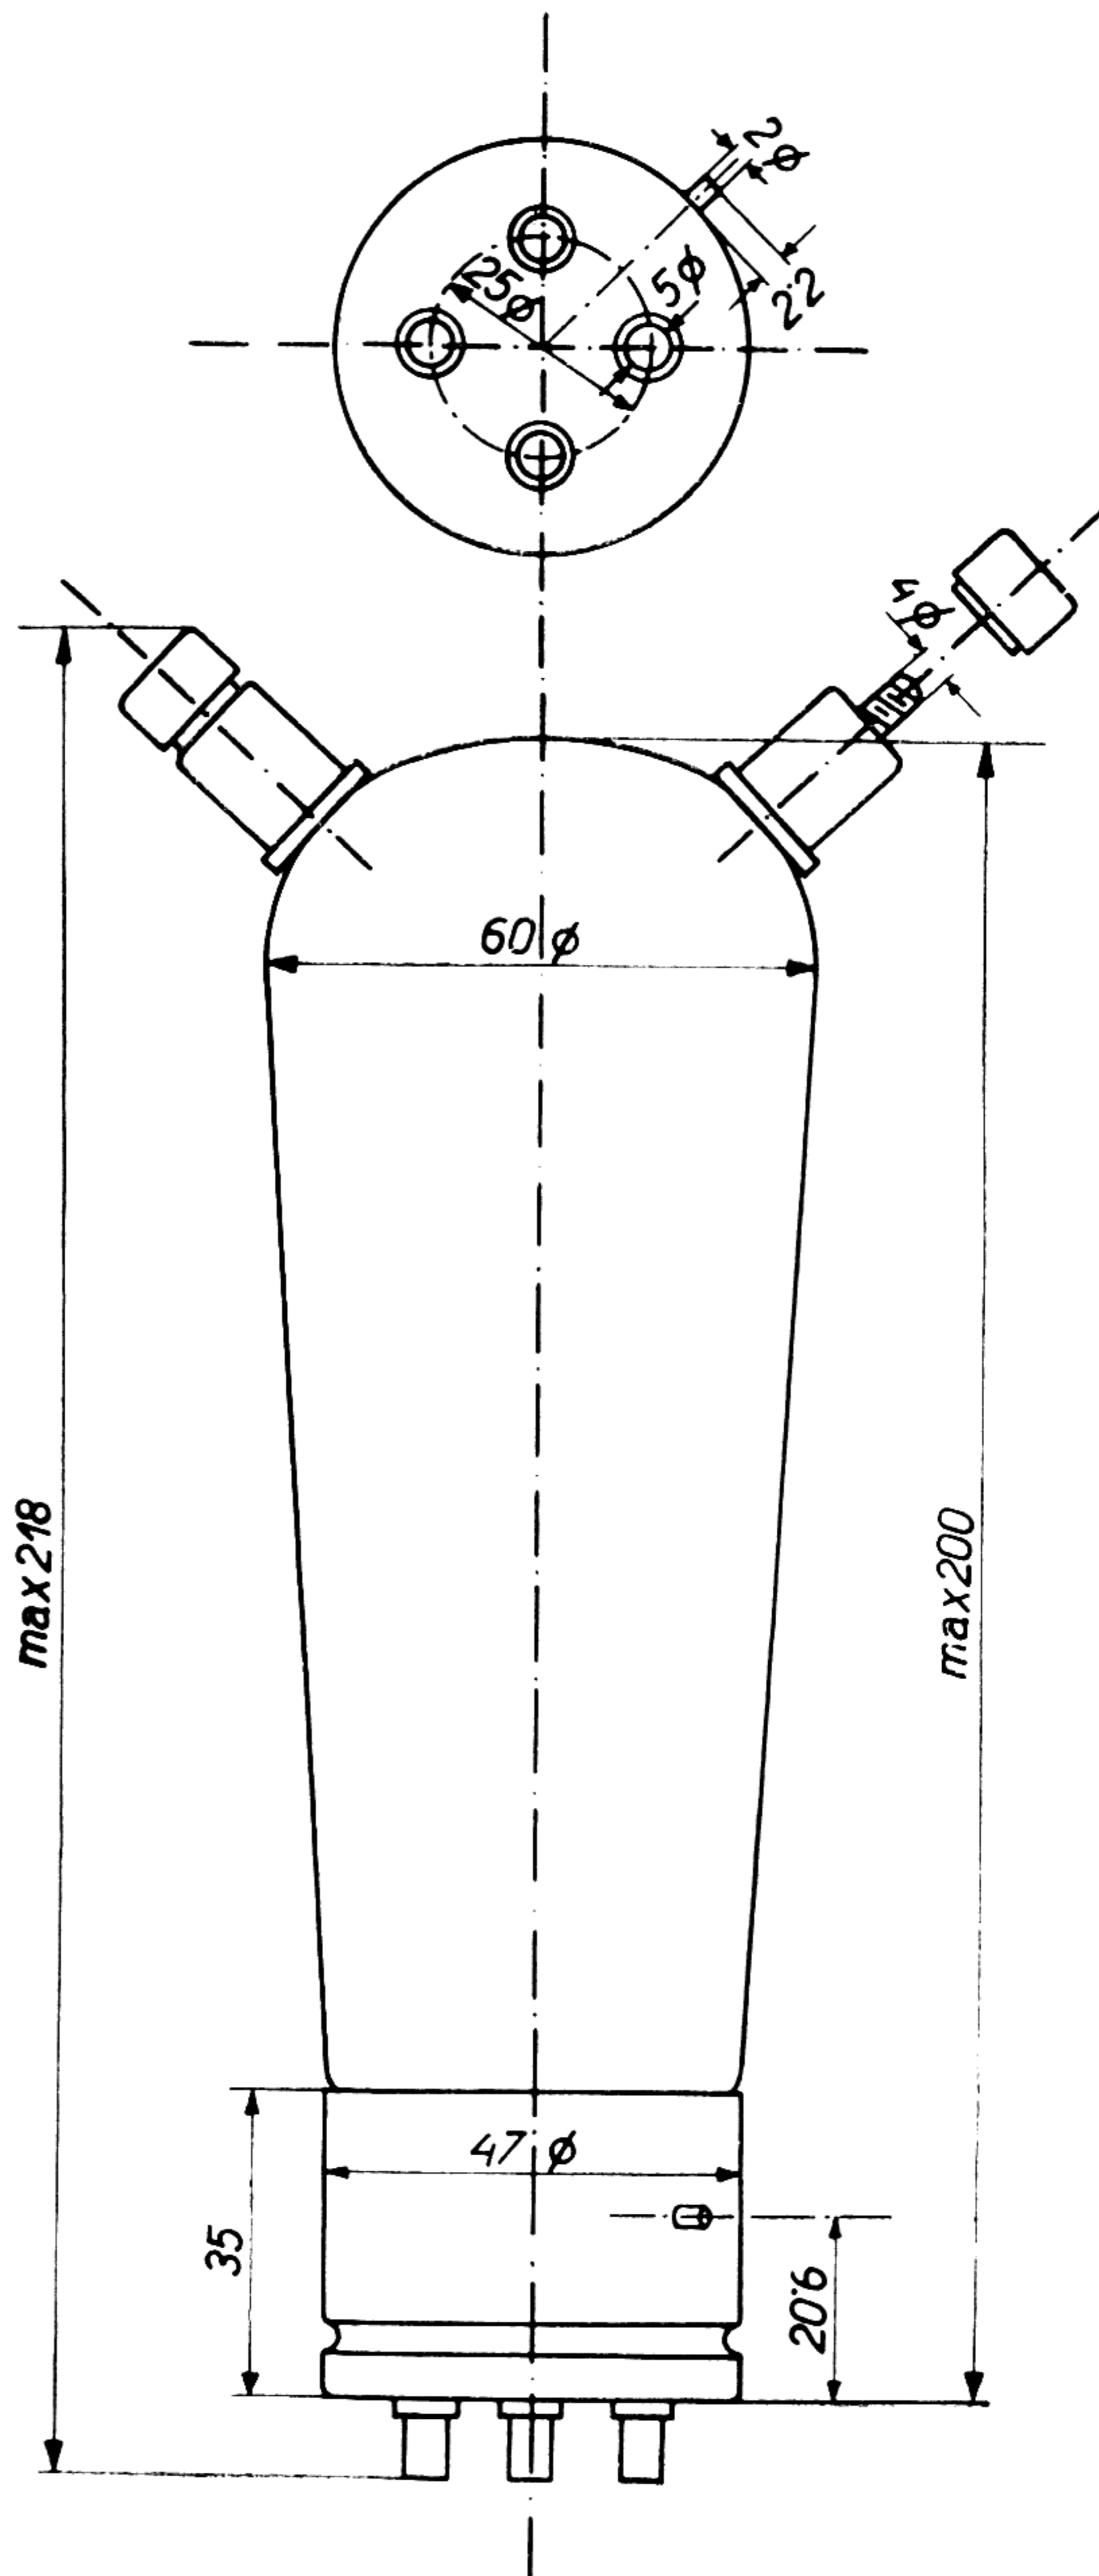


TUNGSRAM RADIO

Senderöhre mit Oxydheizfaden


Gewicht cca 230 g.

OQ 71/10000

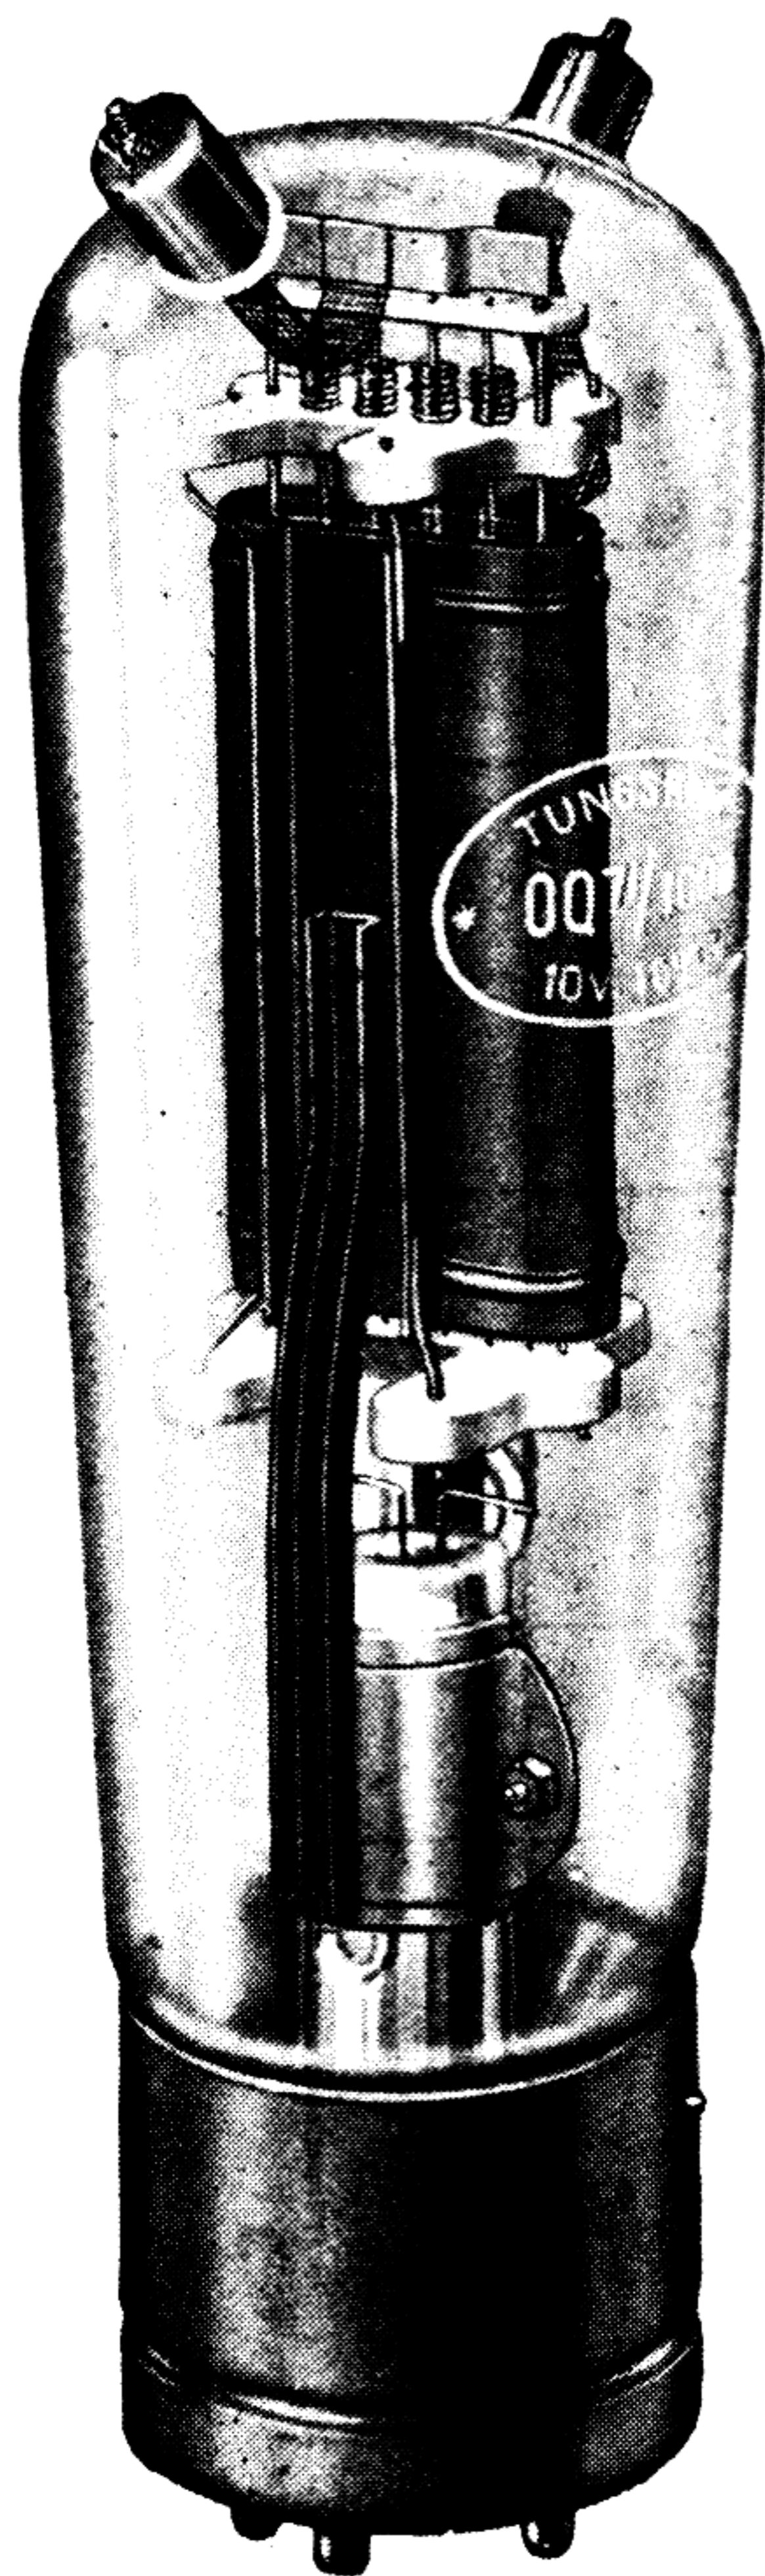

Sockel: F 46

TUNGSRAM RADIO


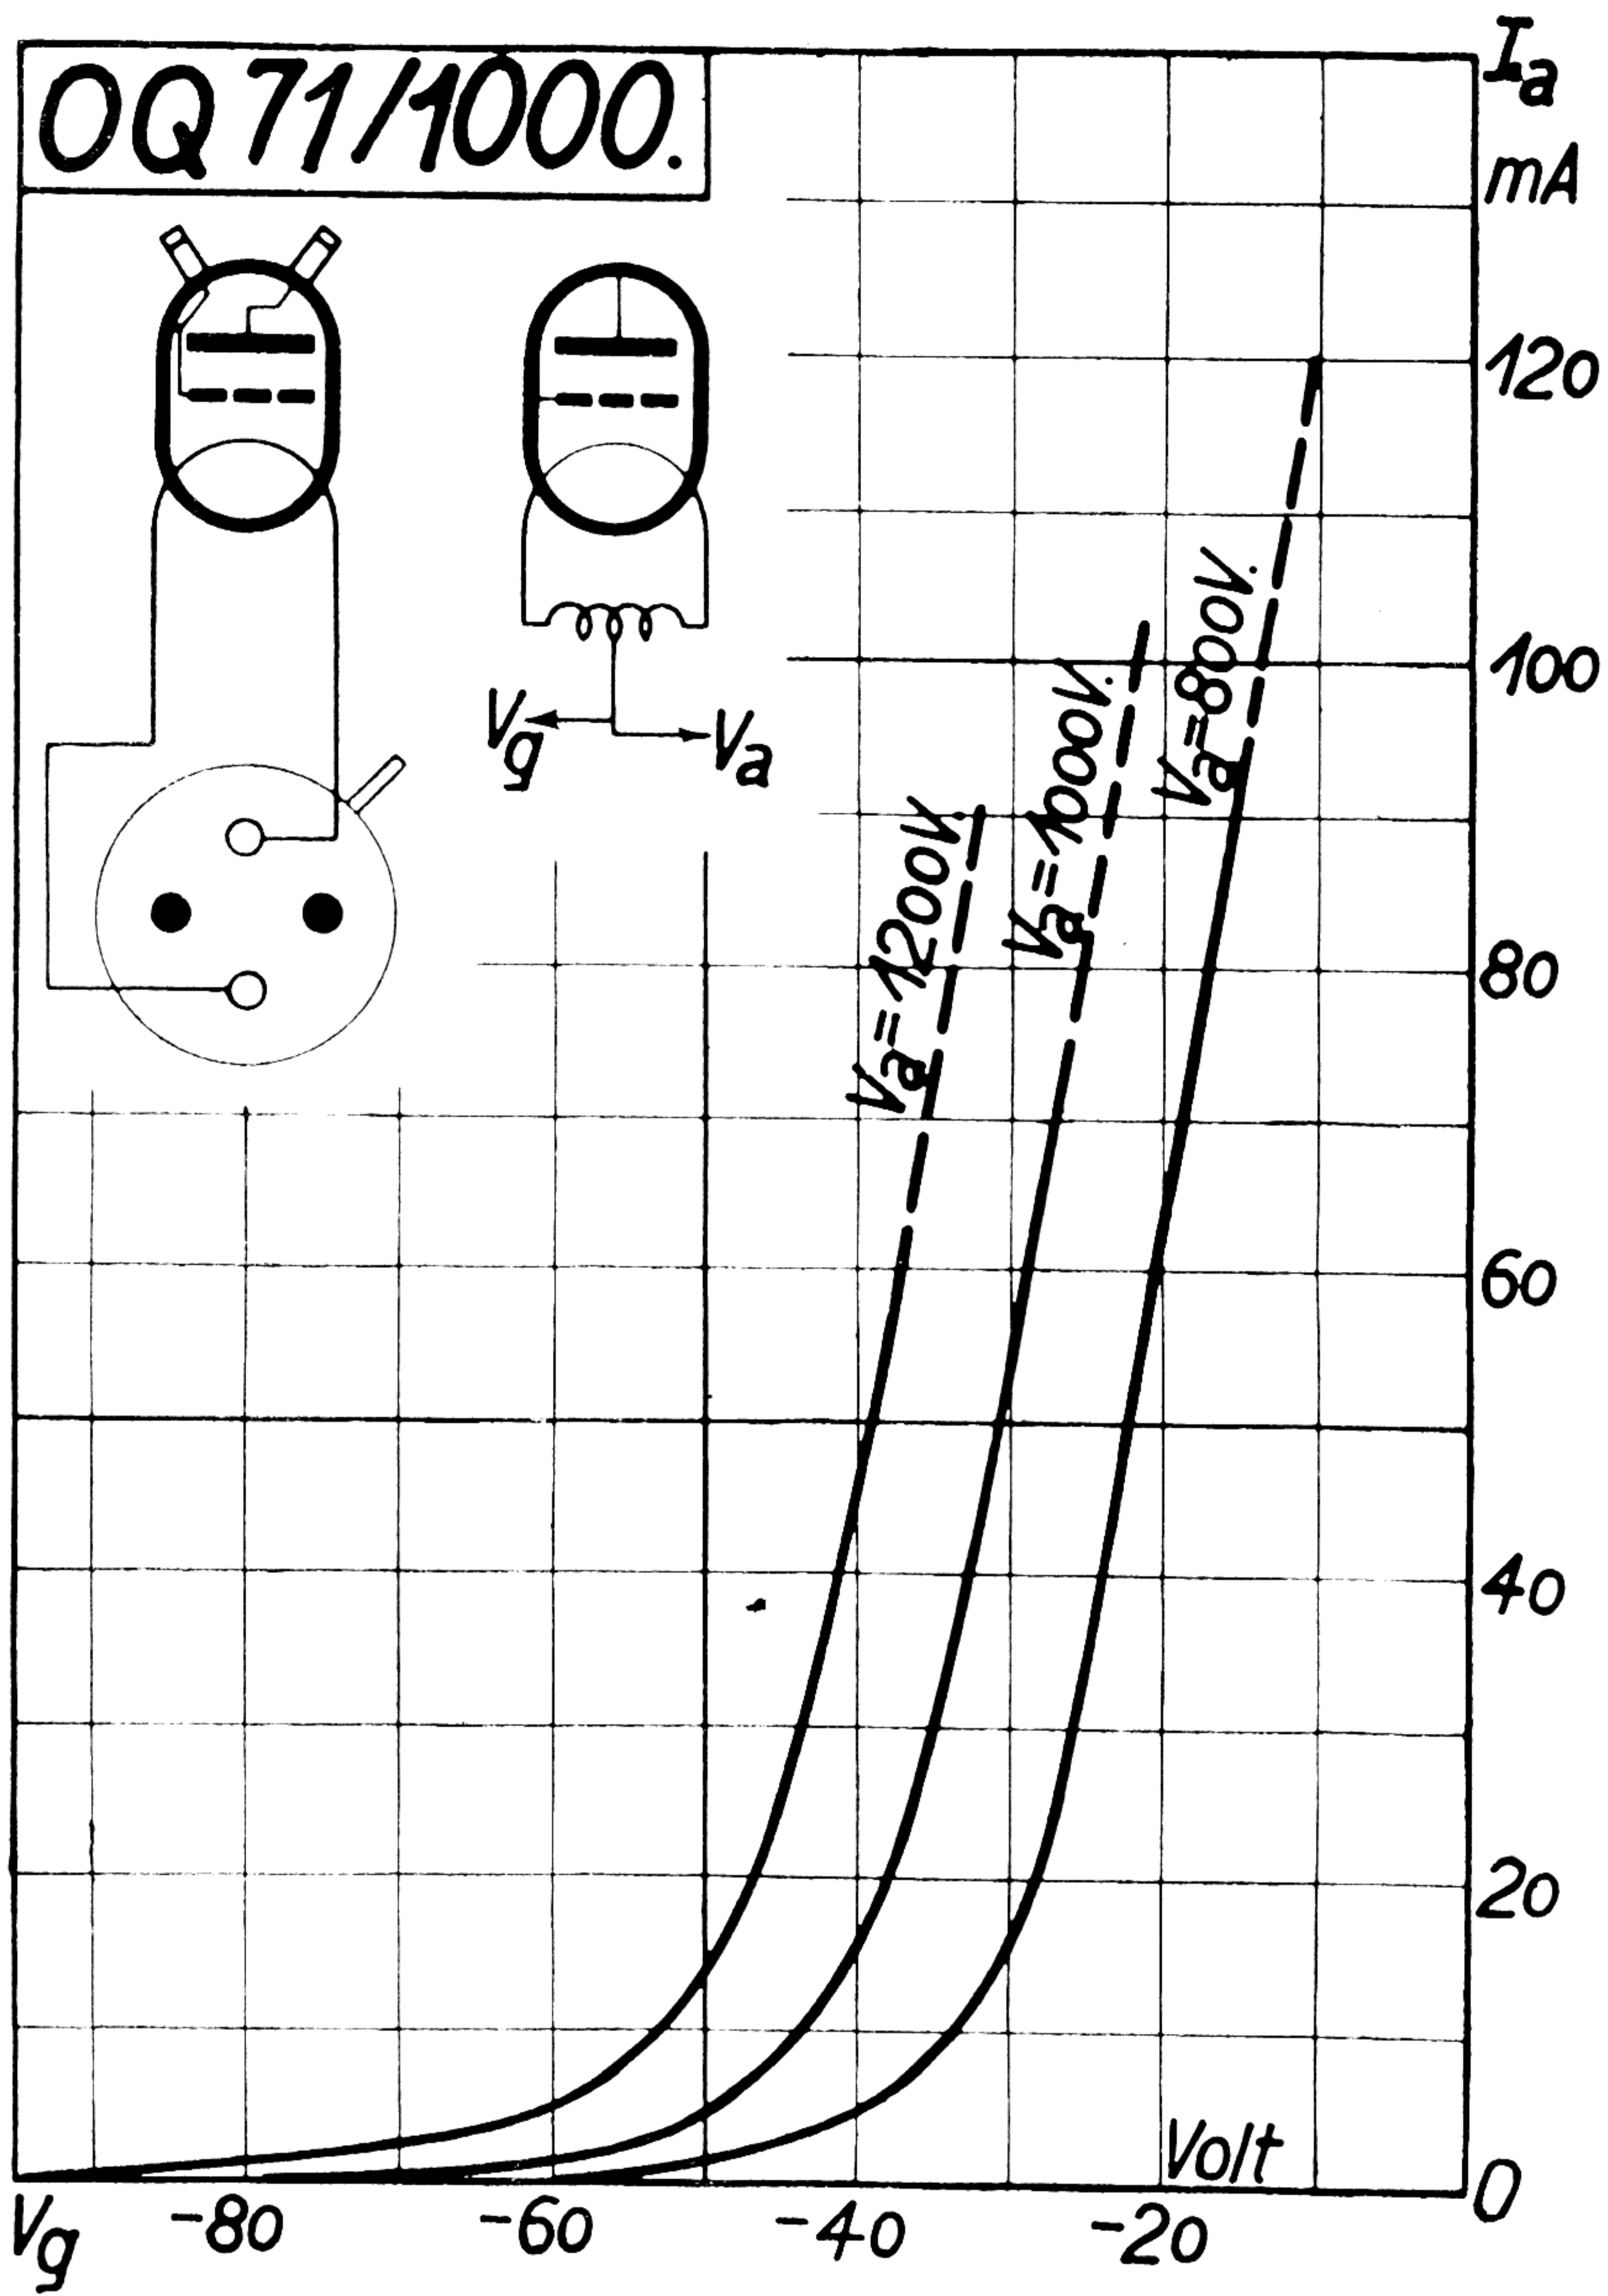


V_f — 10 Volt
 I_f — 1.25 Amp.
 $V_{a \max}$ — 1000 Volt
 S — 5 mA/V
 g — 23
 R_i — 4600 Ohm
 $W_{a \max}$ — 75 Watt

C_{ga} — 10 μ F
 C_{gk} — 9.5 "
 C_{ak} — 4.5 "
 λ_{\min} — 2.55 m

Vorläufige Daten

TUNGSRAM RADIO

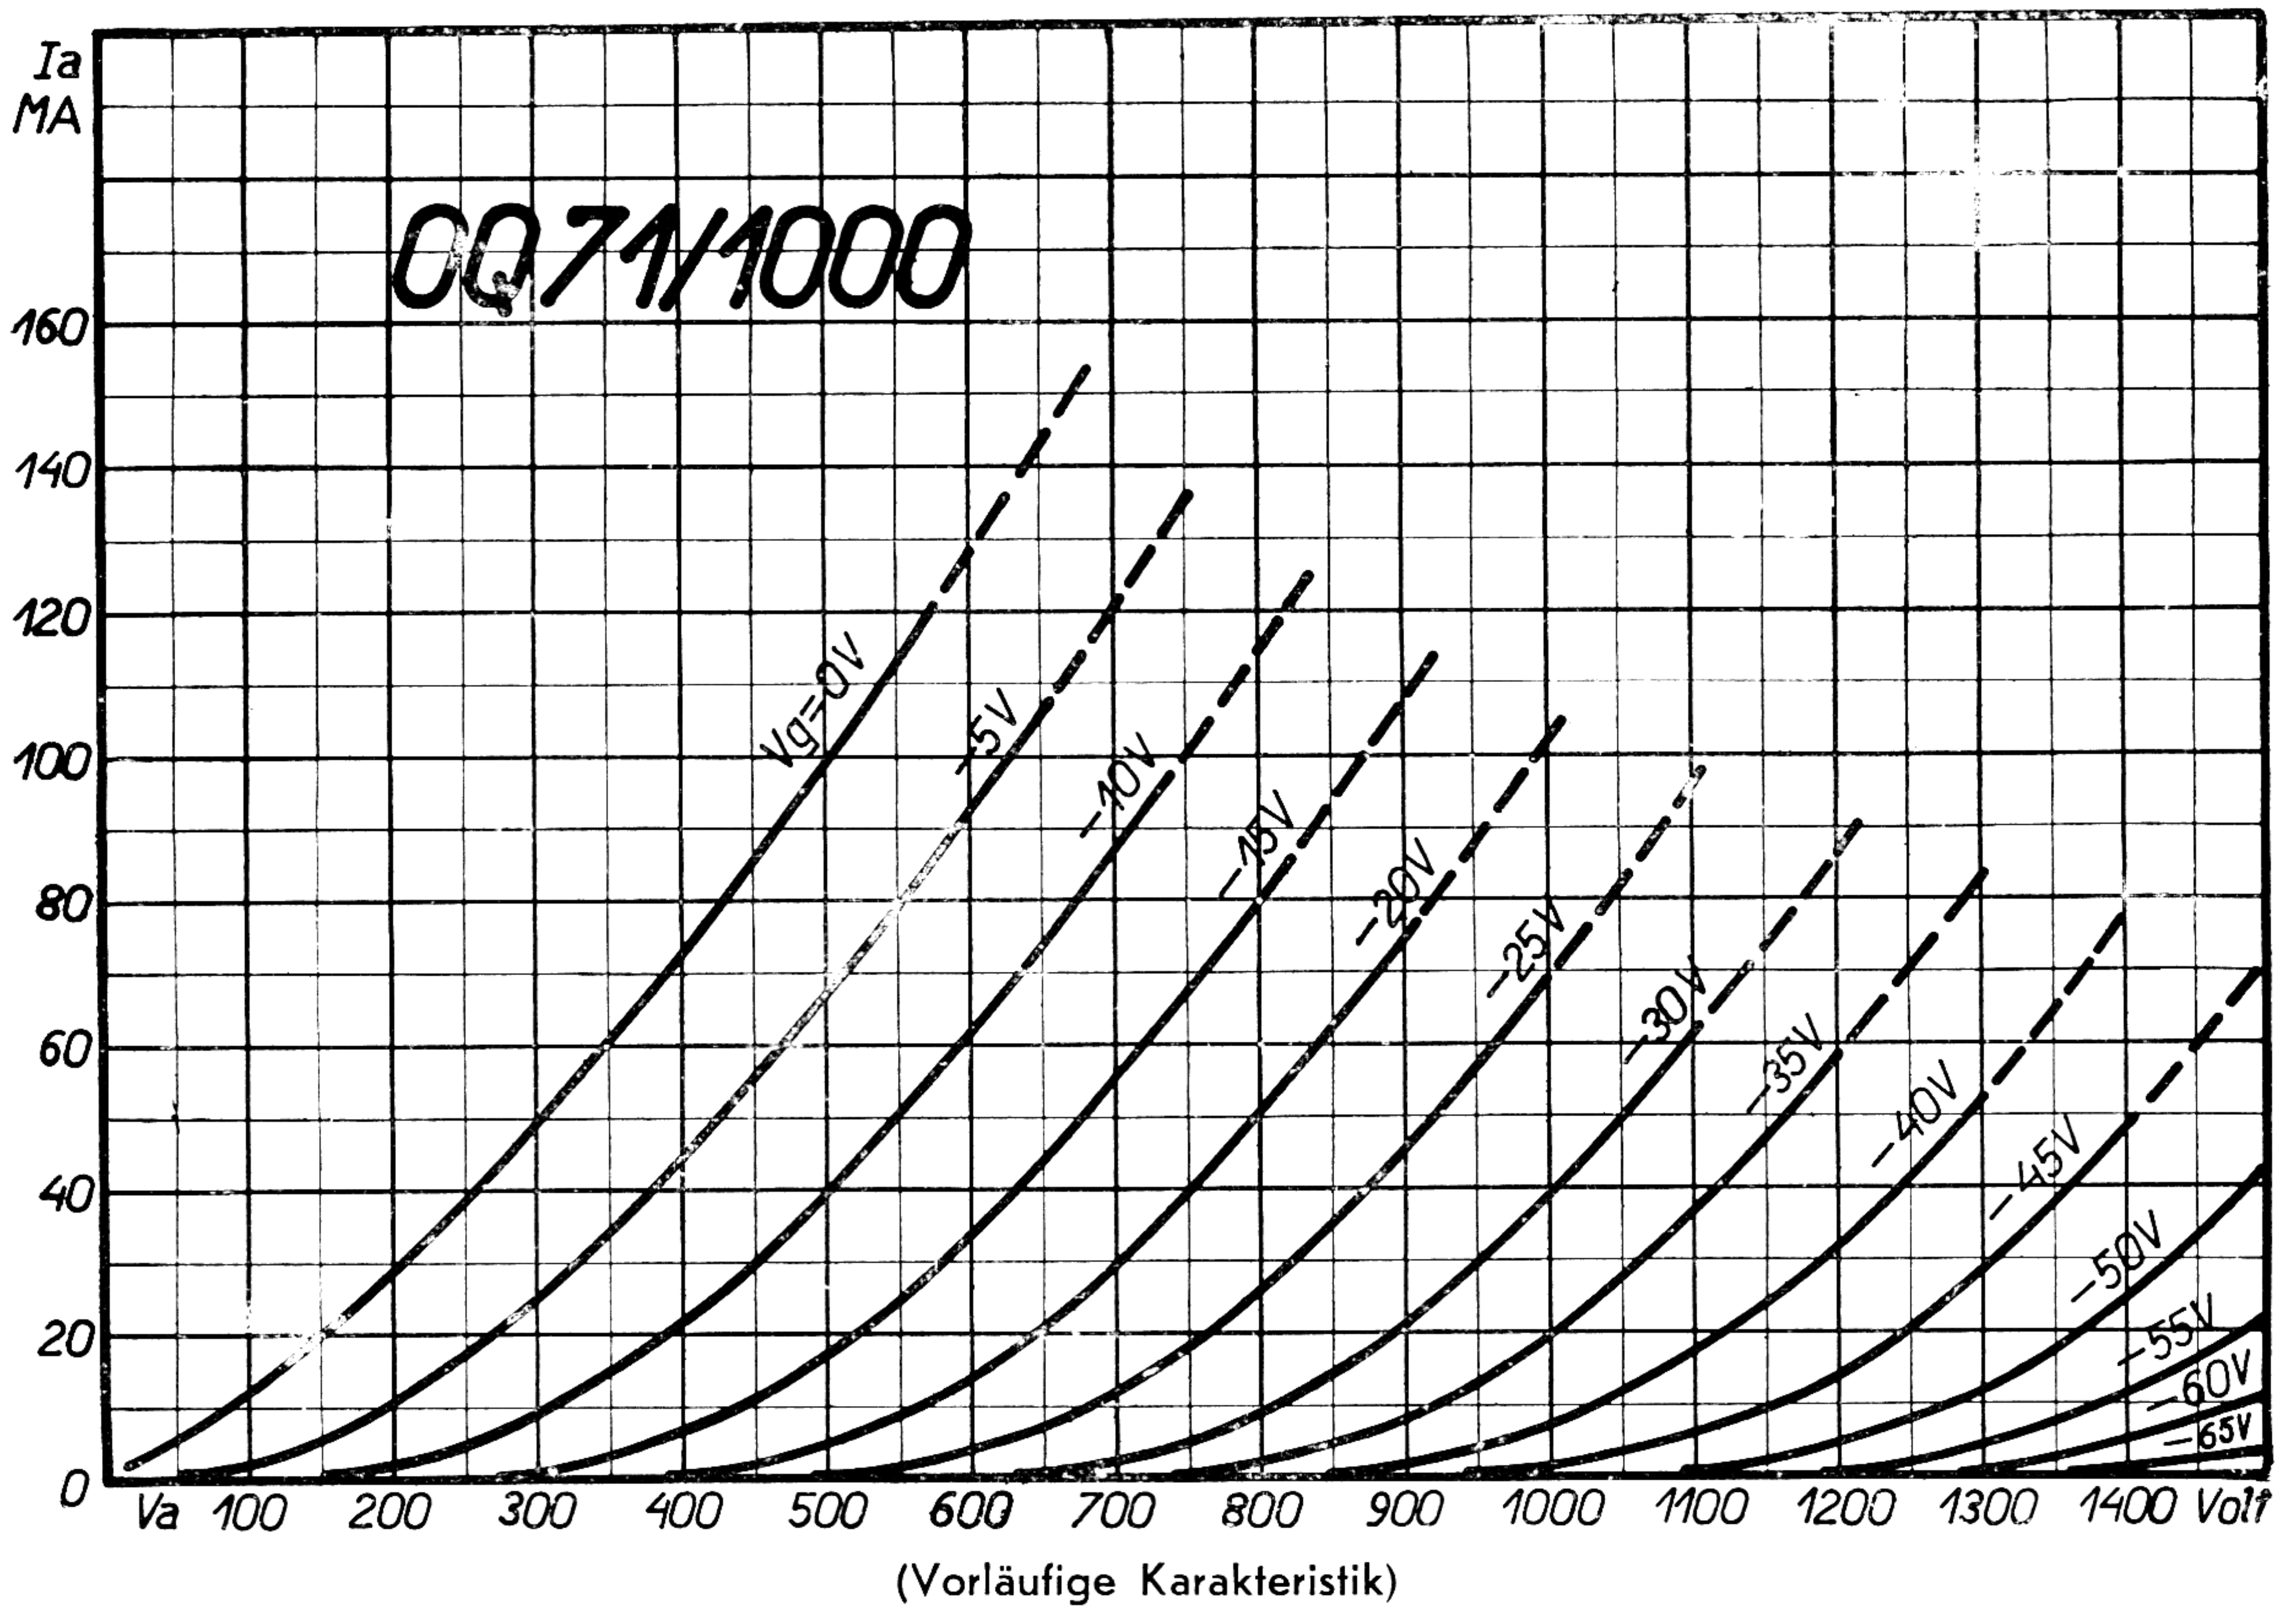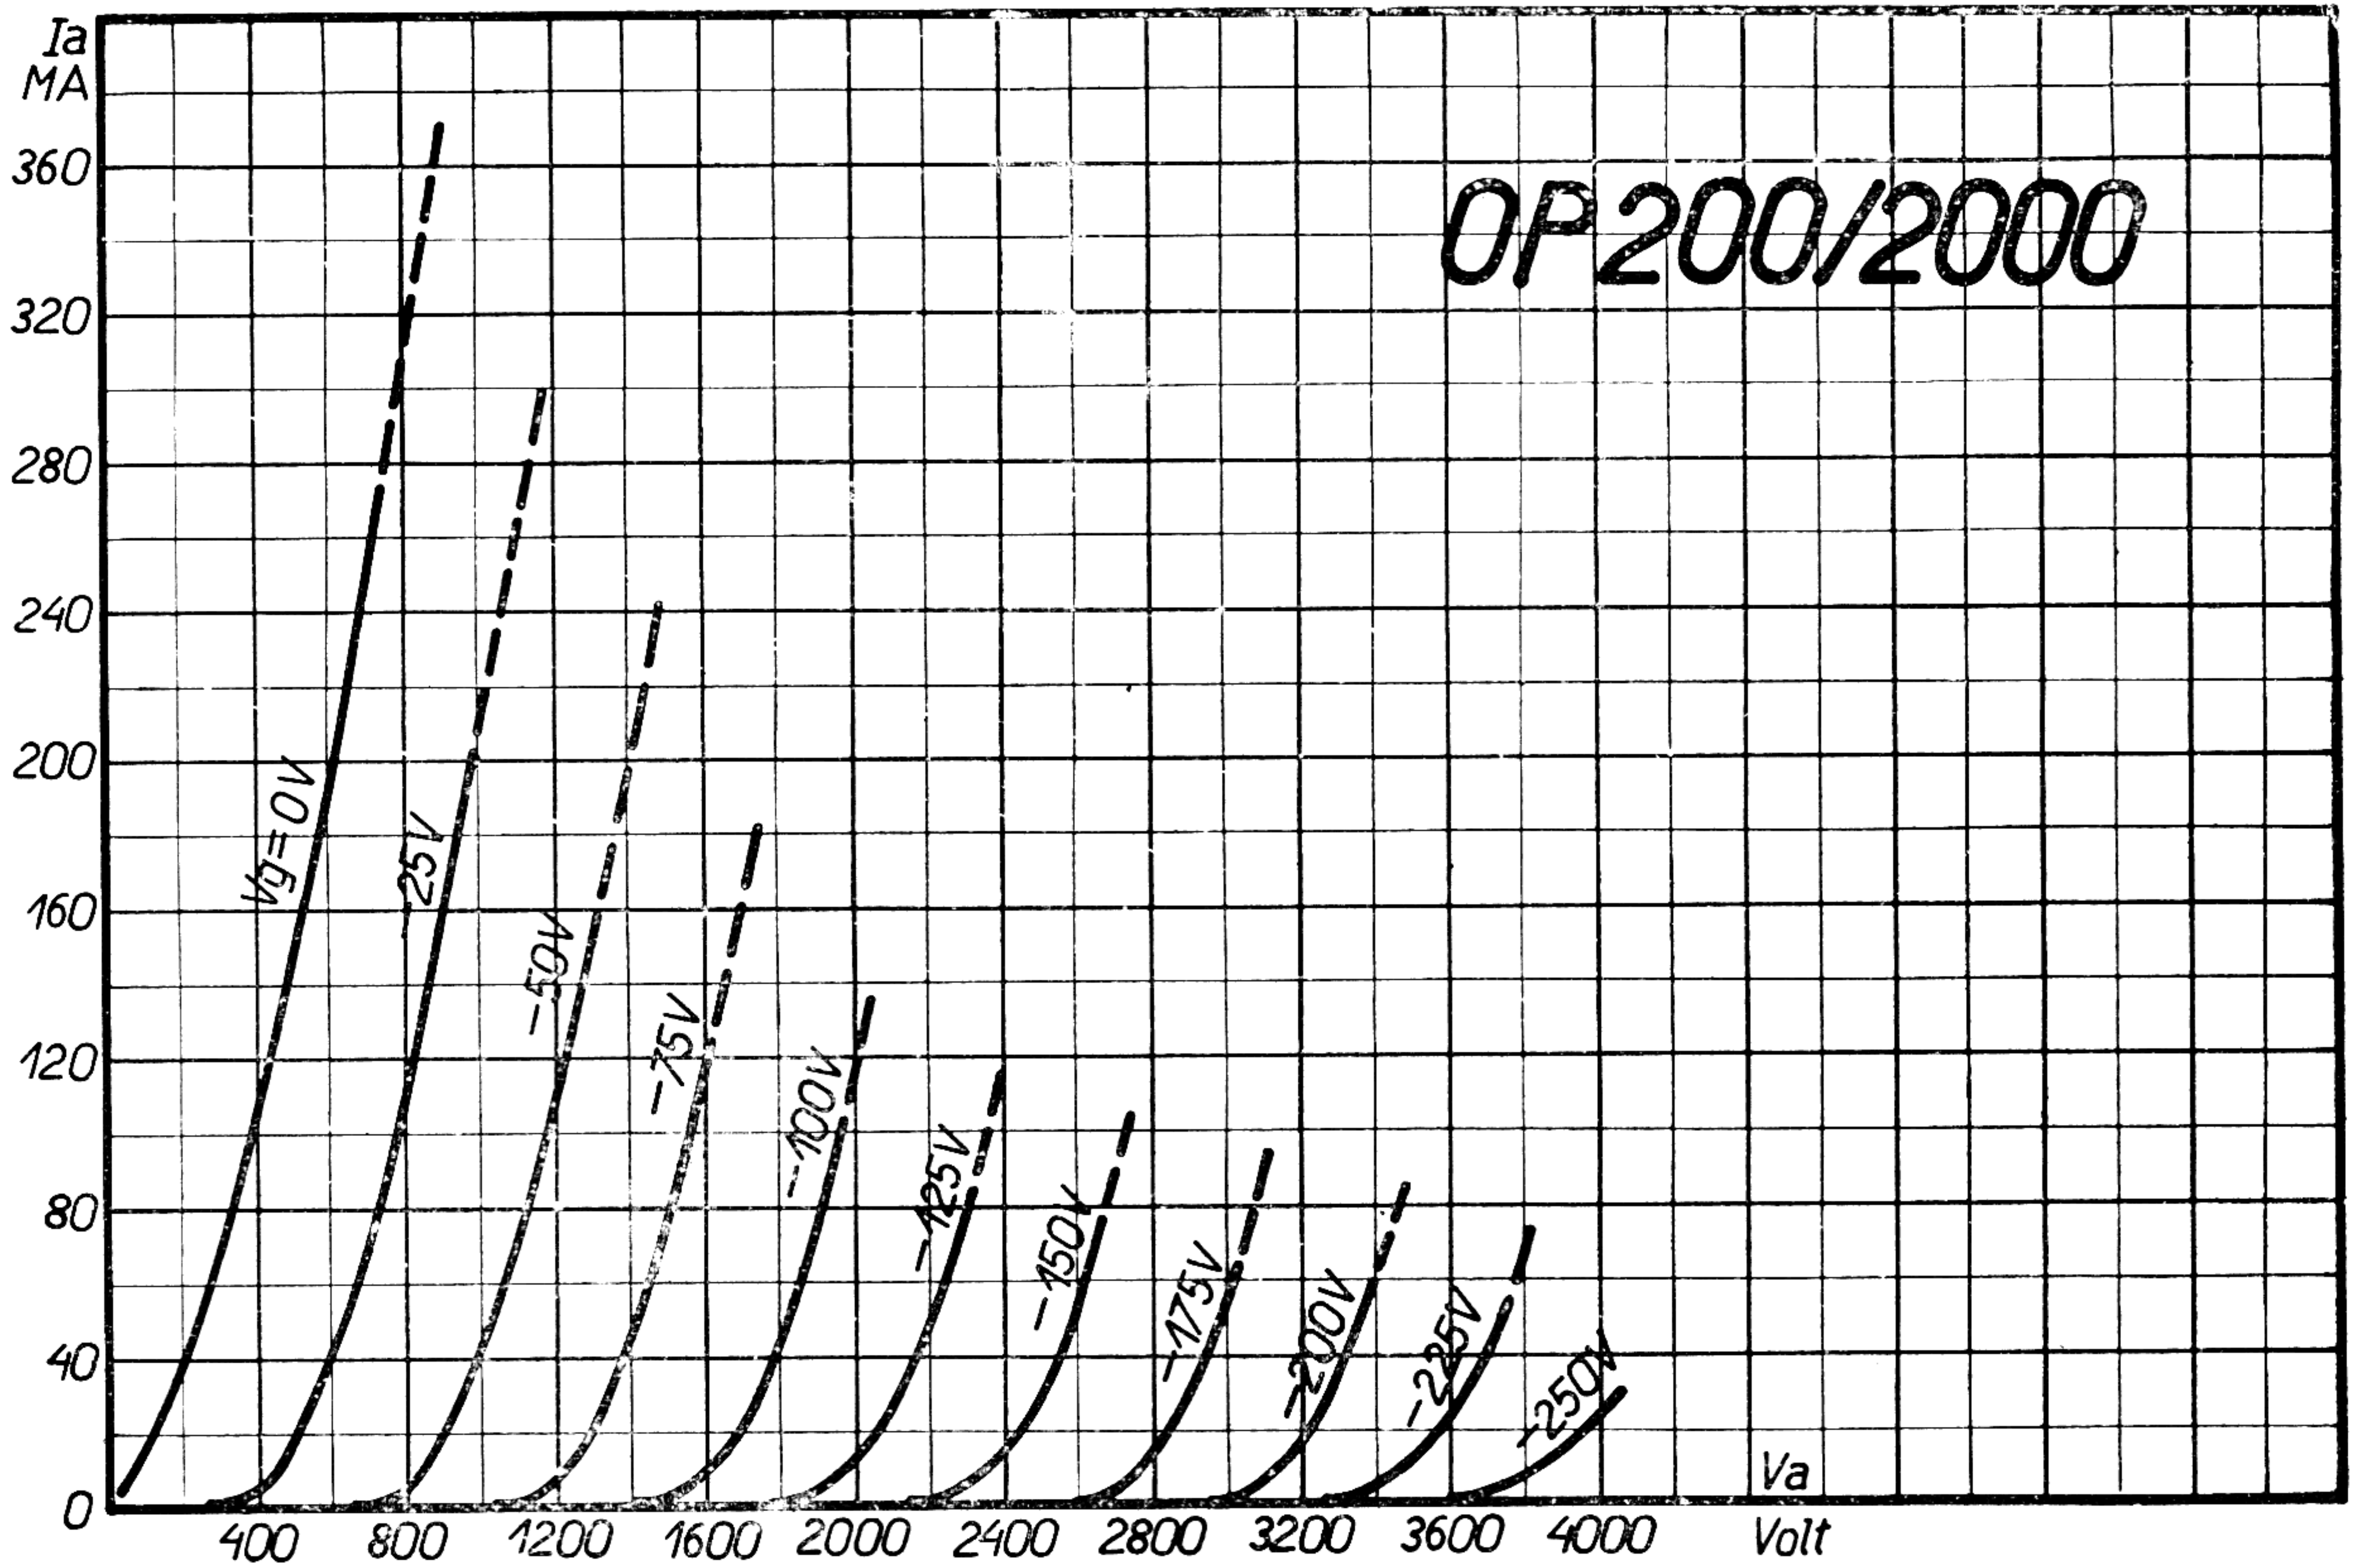

Sept. 1937.