

Power Pentode

7-PIN MINIATURE TYPE

GENERAL DATA

Electrical:

Heater, for Unipotential Cathode:

Voltage (AC or DC)	60 ± 10%	volts
Current at 60 volts	0.1	amp

Direct Interelectrode Capacitances

(Approx.):[▲]

Grid No.1 to plate.	0.65	μf
Grid No.1 to cathode & grid No.3, grid No.2, and heater	17	μf
Plate to cathode & grid No.3, grid No.2, and heater	9	μf


Characteristics, Class A₁ Amplifier:

Plate Supply Voltage.	110	volts
Grid-No.2 Supply Voltage.	115	volts
Cathode Resistor.	62	ohms
Plate Resistance (Approx.)	17500	ohms
Transconductance.	13500	μmhos
Plate Current	36	ma
Grid-No.2 Current	10	ma

Mechanical:

Operating Position.	Any
Maximum Overall Length.	2-5/8"
Maximum Seated Length	2-3/8"
Length, Base Seat to Bulb Top (Excluding tip)	2" ± 3/32"
Diameter.	0.650" to 0.750"
Dimensional Outline	See <i>General Section</i>
Bulb.	T5-1/2
Base.	Small-Button Miniature 7-Pin (JEDEC No.E7-1)
Basing Designation for BOTTOM VIEW.	7CV

Pin 1 - Cathode,
Grid No.3
Pin 2 - Grid No.1
Pin 3 - Heater



Pin 4 - Heater
Pin 5 - Grid No.1
Pin 6 - Grid No.2
Pin 7 - Plate

AF POWER AMPLIFIER — Class A₁

Maximum Ratings, Design-Maximum Values:

PLATE VOLTAGE	150	max.	volts
GRID-No.2 (SCREEN-GRID) VOLTAGE	130	max.	volts
GRID-No.1 (CONTROL-GRID) VOLTAGE:			
Positive-bias value	0	max.	volts
GRID-No.2 INPUT	2	max.	watts
PLATE DISSIPATION	5.5	max.	watts



60FX5

PEAK HEATER-CATHODE VOLTAGE:

Heater negative with respect to cathode.	200	max.	volts
Heater positive with respect to cathode.	200 [●]	max.	volts

BULB TEMPERATURE (At hottest point on bulb surface).	225	max.	°C
--	-----	------	----

Typical Operation:

Plate Supply Voltage.	110		volts
Grid-No.2 Supply Voltage.	115		volts
Cathode Resistor.	62		ohms
Peak AF Grid-No.1 Voltage	3		volts
Zero-Signal Plate Current	36		ma
Max.-Signal Plate Current	35		ma
Zero-Signal Grid-No.2 Current	10		ma
Max.-Signal Grid-No.2 Current	12		ma
Load Resistance	3000		ohms
Total Harmonic Distortion	8		%
Max.-Signal Power Output.	1.3		watts

Maximum Circuit Values:


Grid-No.1-Circuit Resistance:			
For fixed-bias operation.	0.1	max.	megohm
For cathode-bias operation.	0.5	max.	megohm

[▲] Without external shield.

[●] The dc component must not exceed 100 volts.




AVERAGE CHARACTERISTICS

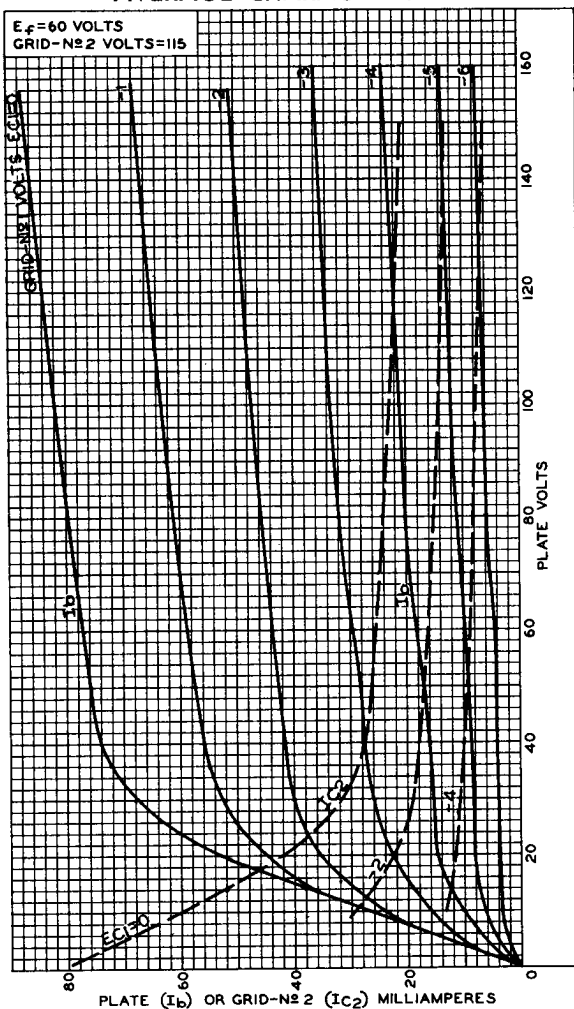

60FX5

OPERATION CHARACTERISTICS

$E_f=60$ VOLTS
PLATE SUPPLY VOLTS=110
GRID-№2 SUPPLY VOLTS=115
CATHODE RESISTOR (OHMS)=62
CATHODE-BYPASS CAPACITOR (μf)=100
SIGNAL VOLTS (RMS)=2.1

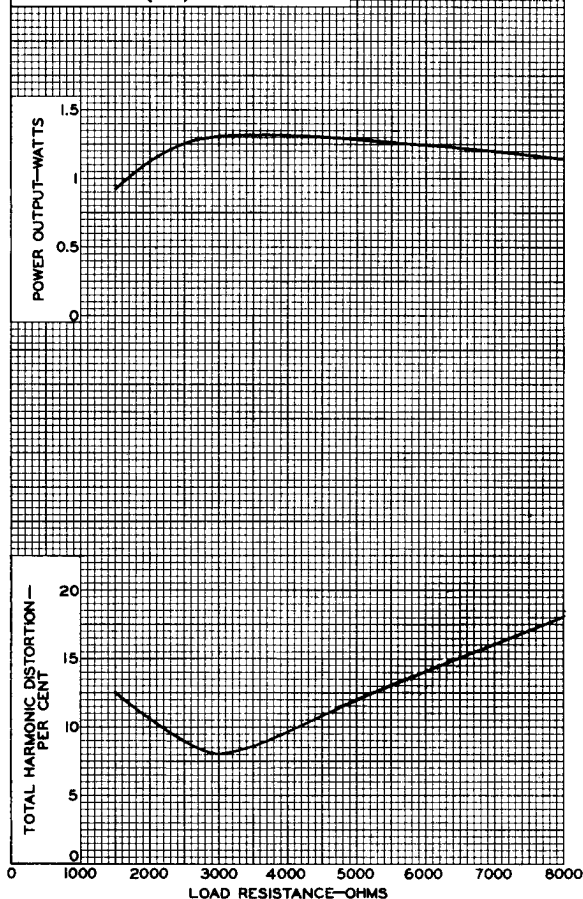

92CM-10545

