

Medium-Mu Triode— Sharp-Cutoff Tetrode

9-PIN MINIATURE TYPE

With Heater Having Controlled Warm-up Time

GENERAL DATA

Electrical:

Heater, for Unipotential Cathodes:

Voltage (AC or DC)	6.3	volts
Current	0.45 ± 6%	amp ←
Warm-up time (Average)	11	sec

Direct Interelectrode Capacitances:

	Without External Shield	With External Shield [▲]	
<i>Triode Unit:</i>			
Grid to plate	1.8	1.8	μf
Grid to cathode and heater	2.7	2.7	μf
Plate to cathode and heater	0.4	1.2	μf
<i>Tetrode Unit:</i>			
Grid No.1 to plate	0.019 max.	0.015 max.	μf
Grid No.1 to cathode & internal shield, grid No.2, and heater	5	5	μf
Plate to cathode & internal shield, grid No.2, and heater	2.5	3.3	μf
Tetrode plate to triode plate	0.07 max.	0.01 max.	μf
Heater to cathode (Each unit)	3	3 [•]	μf

Characteristics, Class A₁ Amplifier:

	Triode Unit	Tetrode Unit	
Plate Supply Voltage	125	125	volts
Grid-No.2 Supply Voltage	—	125	volts
Grid-No.1 Supply Voltage	—	-1	volt
Cathode Resistor	56	—	ohms
Amplification Factor	40	—	
Plate Resistance (Approx.)	5000	140000	ohms
Transconductance	8000	5800	μmhos
Plate Current	15	12	ma
Grid-No.2 Current	—	4.2	ma
Grid-No.1 Voltage (Approx.) for plate μa = 100	-7	-7	volts

Mechanical:

Operating Position Any


← Indicates a change.



6CQ8

Maximum Overall Length 2-3/16"
 Maximum Seated Length 1-15/16"
 Length, Base Seat to Bulb Top (Excluding tip). 1-9/16" ± 3/32"
 → Diameter 0.750" to 0.875"
 Dimensional Outline See *General Section*
 Bulb T6-1/2
 Base Small-Button Noval 9-Pin (JEDEC No.E9-1)
 Basing Designation for BOTTOM VIEW 9GE

Pin 1-Triode Plate
 Pin 2-Tetrode
 Grid No.1
 Pin 3-Tetrode
 Grid No.2
 Pin 4-Heater
 Pin 5-Heater
 Pin 6-Tetrode Plate



Pin 7-Tetrode
 Cathode,
 Internal
 Shield
 Pin 8-Triode
 Cathode
 Pin 9-Triode
 Grid

AMPLIFIER — Class A₁

→ Maximum Ratings, Design-Maximum Values:

	<i>Triode Unit</i>	<i>Tetrode Unit</i>	
PLATE VOLTAGE	330 max.	330 max.	volts
GRID-No.2 (SCREEN-GRID) SUPPLY VOLTAGE	-	330 max.	volts
GRID-No.2 VOLTAGE	-	<i>See Grid-No.2 Input Rating Chart at front of Receiving Tube Section</i>	
GRID-No.1 (CONTROL-GRID) VOLTAGE:			
Positive-bias value	0 max.	0 max.	volts
GRID-No.2 INPUT:			
For grid-No.2 voltages up to 165 volts	-	0.7 max.	watt
For grid-No.2 voltages between 165 and 330 volts		<i>See Grid-No.2 Input Rating Chart at front of Receiving Tube Section</i>	
GRID INPUT	0.55 max.	-	watt
PLATE DISSIPATION	3.1 max.	3.2 max.	watts
PEAK HEATER-CATHODE VOLTAGE:			
Heater negative with respect to cathode.	200 max.	200 max.	volts
Heater positive with respect to cathode.	200* max.	200* max.	volts

Maximum Circuit Values:

	<i>Triode Unit</i>	<i>Tetrode Unit</i>	
Grid-No.1-Circuit Resistance:			
For fixed-bias operation.	0.5 max.	0.25 max.	megohm
For cathode-bias operation.	1 max.	1 max.	megohm

→ Indicates a change.




- ▲ With external shield JEDEC No.315 connected to cathode of unit under test except as noted.
- With external shield JEDEC No.315 connected to ground.
- ★ The dc component must not exceed 100 volts.



6CQ8

AVERAGE CHARACTERISTICS Triode Unit

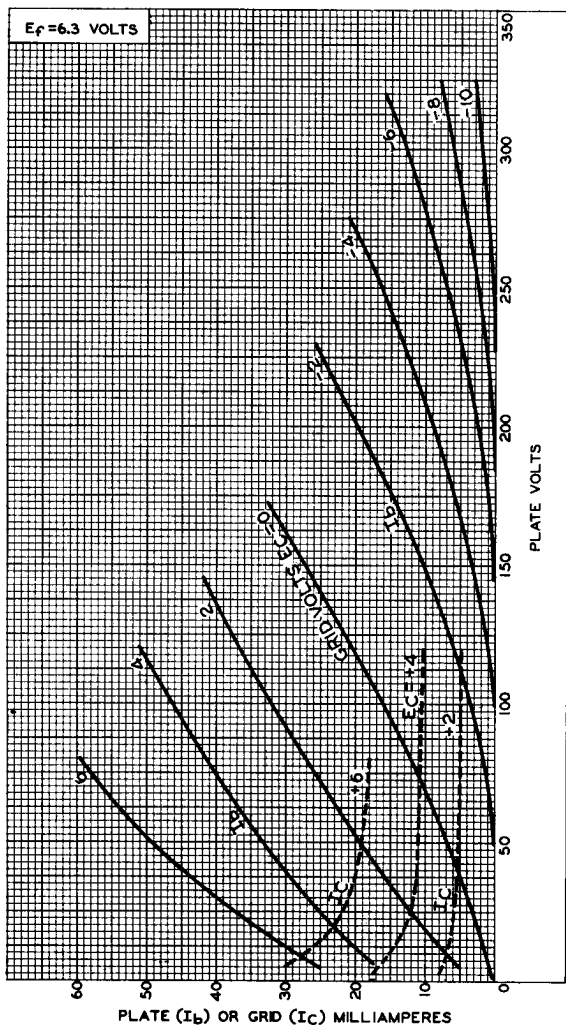


92CM-9190RI

RADIO CORPORATION OF AMERICA
Electron Tube Division

Harrison, N. J.




AVERAGE CHARACTERISTICS Triode Unit

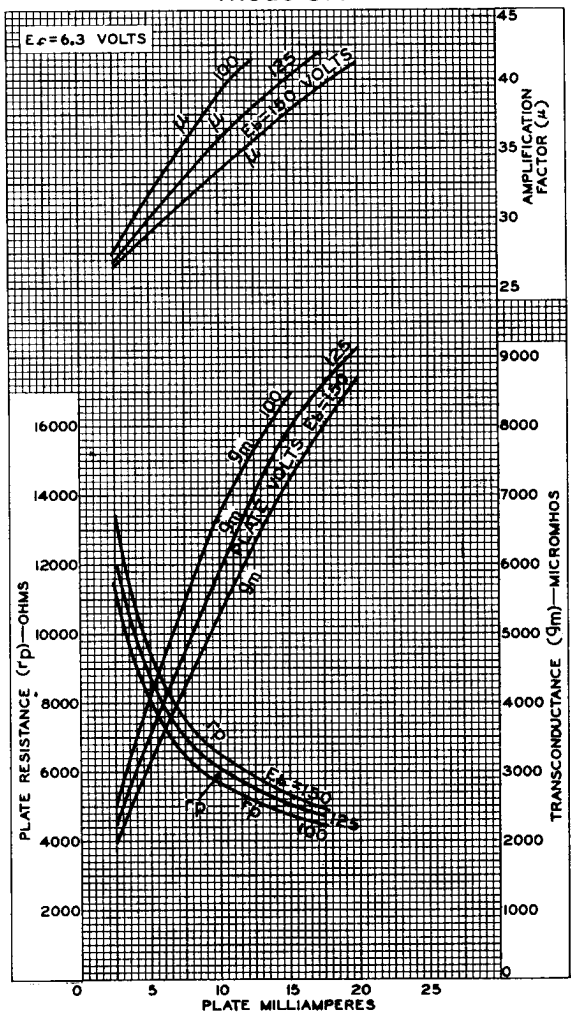

92CM-7871R1



AVERAGE CHARACTERISTICS Tetrode Unit

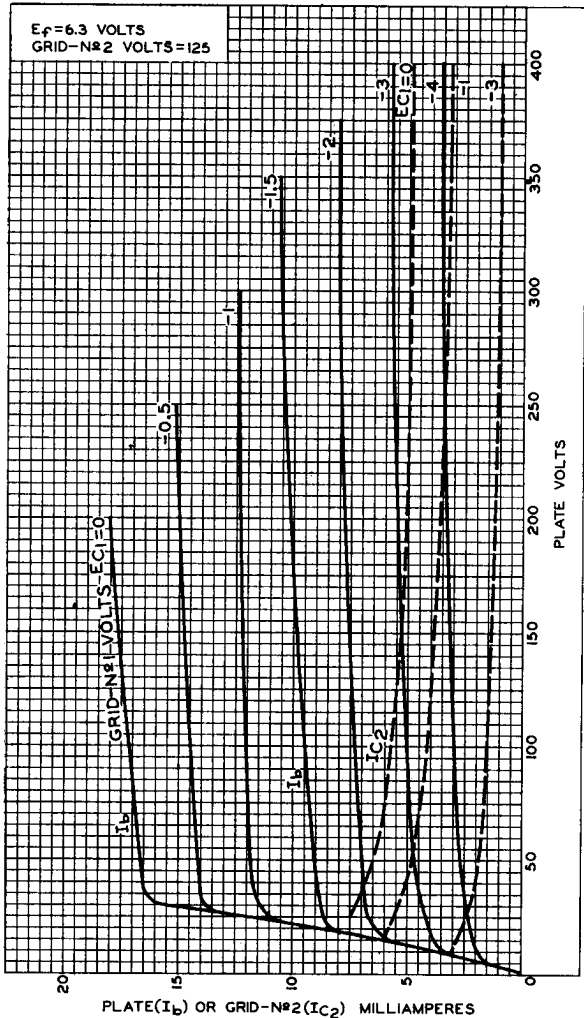


92CM-9197



AVERAGE CHARACTERISTICS

Tetrode Unit

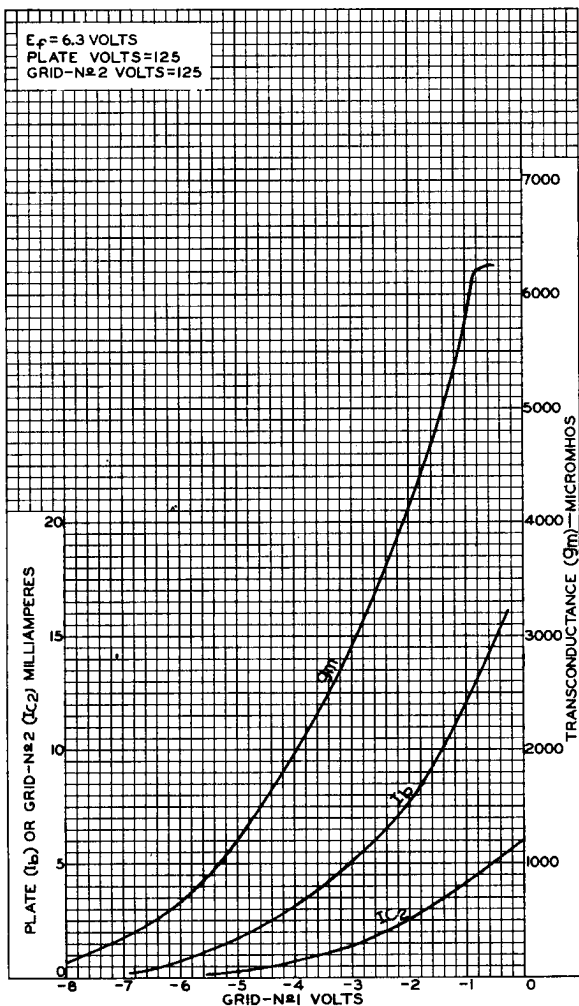

92CM-9195

